RNAV (GPS) RWY 26

NORTHUMBERLAND COUNTY (N79)

WAAS CH 50424 W26A	APP CRS 264°	Rwy Ldg 3297 TDZE 881 Apt Elev 881


RNP APCH - GPS.


Baro-VNAV and VDP NA when using Selinsgrove altimeter setting. Rwy 26 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Selinsgrove altimeter setting and increase LPV DA to 1529 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1651 feet and all visibilities ⅝ SM. Increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM.


NA

MISSED APPROACH: Climb to 3400 direct YUTYO and hold, continue climb-in-hold to 3400.

AWOS-3	HARRISBURG APP CON	UNICOM	
119.175	118.25 269.45	122.8 (CTAF)	121.8 L

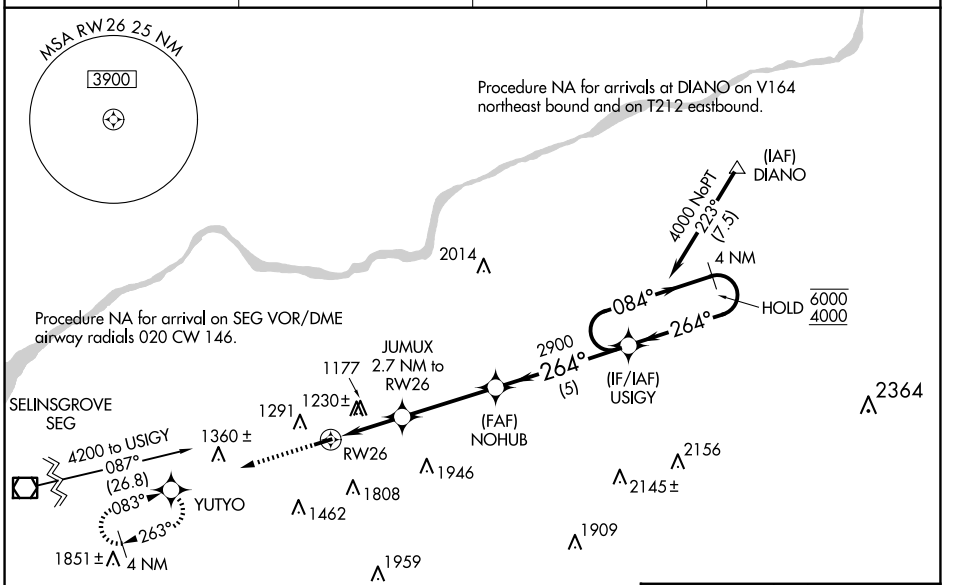

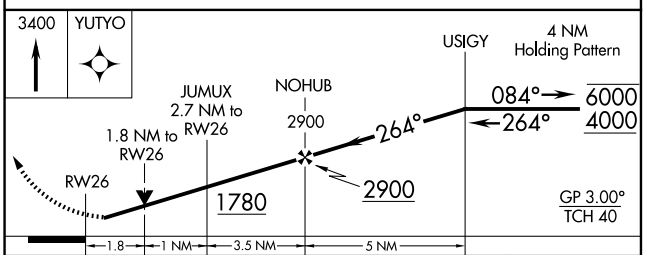

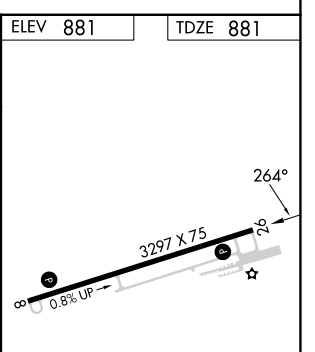

CATEGORY	A	B	C	D
LPV DA	1437-1⅝	556 (600-1⅝)		NA
LNAV/VNAV DA	1559-1⅞	678 (700-1⅞)		NA
LNAV MDA	1480-1	599 (600-1)	1480-1¾ 599 (600-1¾)	NA
CIRCLING	1820-1¼ 939 (1000-1¼)	1880-1½ 999 (1000-1½)	2120-3 1239 (1300-3)	NA

MIRL Rwy 8-26 L
REIL Rwys 8 and 26 L

NE-4, 29 OCT 2026 to 26 NOV 2026