# RNAV (GPS) RWY 32


## CHEROKEE COUNTY (JSO)


| WAAS | APP CRS | Rwy Ldg | 5006 |
|---|---|---|---|
| CH 90327 | 315° | TDZE | 665 |
| W32A | | Apt Elev | 678 |


T A Baro-VNAV NA when using Nacogdoches altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Nacogdoches altimeter setting and increase DA 118 feet, increase all MDA 120 feet and LPV, LNAV/VNAV visibility all Cats ¼ mile, LNAV and Circling Cat C visibility ⅜ mile. When VGSI inop, Straight-in/Circling Rwy 32 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3100 direct WOSUL and hold.

| AWOS-3PT | LONGVIEW APP CON ★ | UNICOM |
|---|---|---|
| 119.075 | 128.75 379.15 | 122.7 (CTAF) L |

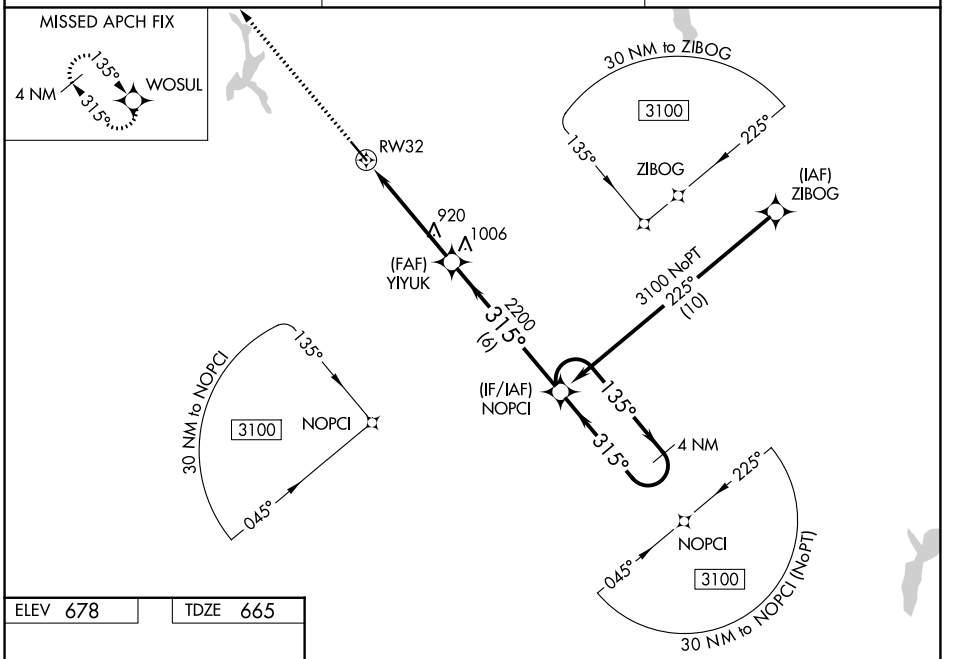

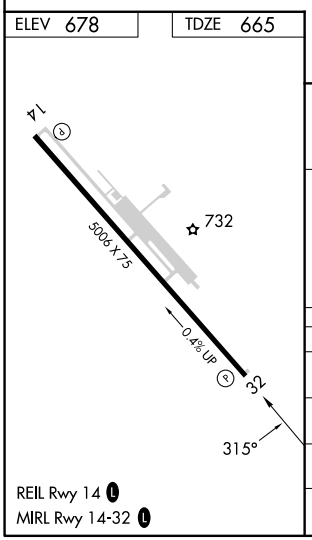
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 915-1 250 (300-1) | | | NA |
| LNAV/VNAV DA | 915-1 250 (300-1) | | | NA |
| LNAV MDA | 1220-1 555 (600-1) | | 1220-1⅝ 555 (600-1⅝) | NA |
| CIRCLING | 1220-1 542 (600-1) | | 1280-1¾ 602 (700-1¾) | NA |

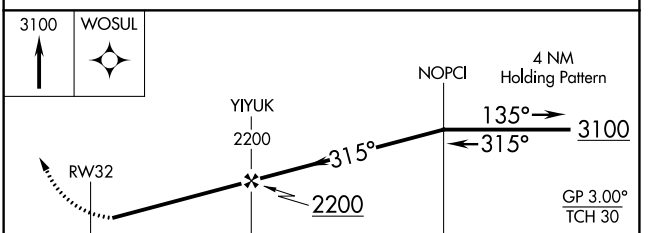

SC-5, 29 OCT 2026 to 26 NOV 2026
SC-5, 29 OCT 2026 to 26 NOV 2026