RNAV (GPS) RWY 27


WALKER COUNTY/BEVILL FLD (JFX)


WAAS	APP CRS	Rwy Ldg	4800
Ch 49025	273°	TDZE	481
W27A		Apt Elev	483


Baro-VNAV NA when using Birmingham altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. VDP NA with Birmingham altimeter setting. When local altimeter setting not received, use Birmingham altimeter setting and increase all DA 104 feet and all MDA 120 feet. Increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C visibility ⅜ mile and Circling Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 2800 direct CECAV and hold.

AWOS-3PT	BIRMINGHAM APP CON	CLNC DEL	GCO	UNICOM
119.225	127.675 338.2	121.725	121.725	123.075 (CTAF) L

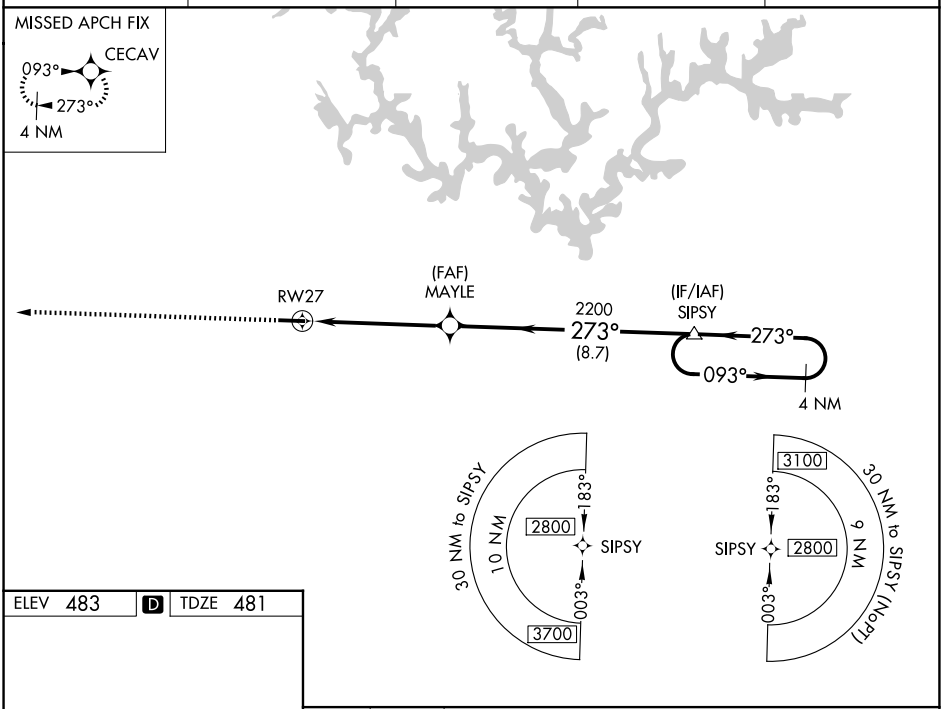

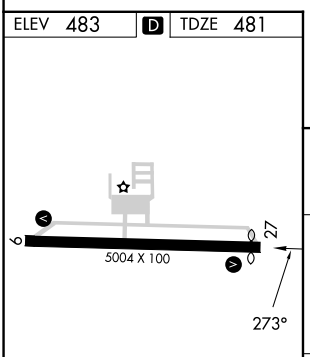

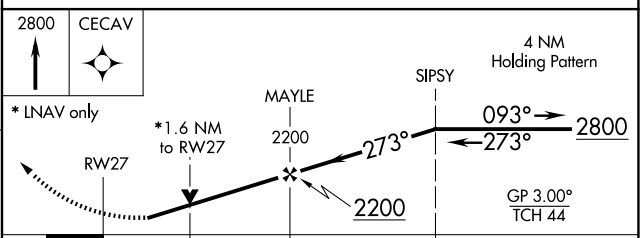

CATEGORY	A	B	C	D
LPV DA	789-1 308 (300-1)			
LNAV/VNAV DA	964-1⅝ 483 (500-1⅝)			
LNAV MDA	1040-1 559 (600-1)		1040-1⅝ 559 (600-1⅝)	
CIRCLING	1040-1 557 (600-1)	1080-1 597 (600-1)	1160-2 677 (700-2)	1360-2¾ 877 (900-2¾)

MIRL Rwy 9-27 L
REIL Rwys 9 and 27 L

SE-4, 29 OCT 2026 to 26 NOV 2026