WAAS CH **77905** **W23A**	APP CRS **234°**	Rwy Ldg **7300** TDZE **7143** Apt Elev **7143**

RNAV (GPS) RWY 23

EVANSTON-UINTA COUNTY BURNS FLD (EVW)

RNP APCH - GPS.


When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -29°C or above 34°C. For inop ALS, increase LNAV/VNAV Cats A/B visibility to ⅞ SM and LNAV Cat C visibility to 1 SM. Inop table does not apply to LNAV/VNAV Cats C/D and LNAV Cat D.


MALSR


MISSED APPROACH: Climb to 12000 direct SOLNE and via 212° track to COOLI and hold, continue climb-in-hold to 12000.

ASOS	SALT LAKE CENTER	GCO	UNICOM
120.0	**127.7 354.125**	**121.72**	**123.0** (CTAF) L

Procedure NA for arrivals at FBR VOR/DME via airway radials 213 CW 285.

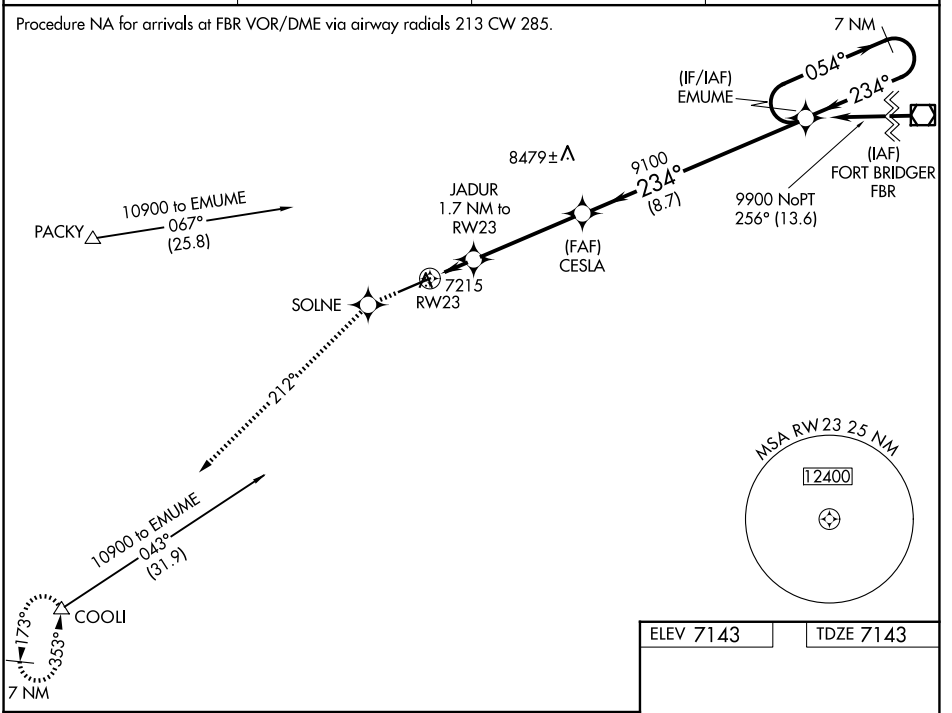

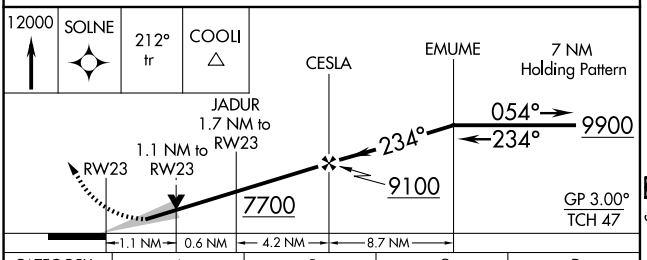



CATEGORY	A	B	C	D
LPV DA	7393-½ 250 (300-½)			
LNAV/VNAV DA	7443-½ 300 (300-½)			7443-¾ 300 (300-¾)
LNAV MDA	7520-½ 377 (400-½)		7520-⅝ 377 (400-⅝)	7520-1 377 (400-1)
CIRCLING	7680-1 537 (600-1)	7760-1 617 (700-1)	7800-1¾ 657 (700-1¾)	8000-2¾ 857 (900-2¾)

REIL Rwy 5 L
HIRL Rwy 5-23 L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026