RNAV (GPS) RWY 17

HUTSON FLD (GAF)


WAAS	APP CRS	Rwy Idg	3898
CH 53518	174°	TDZE	822
W17A		Apt Elev	825


RNP APCH - GPS.

T NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 17 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Grand Forks Intl altimeter setting: increase LPV DA to 1141 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1297 feet and all visibilities ¼ SM; increase all MDA's 80 feet and visibility LNAV and circling Cat C ¼ SM. Baro-VNAV NA when using Grand Forks Intl altimeter setting. Circling NA to Rwys 8 and 26.


MISSED APPROACH: Climb to 4000 direct KUNKY and on track 213° to CEVYA and hold, continue climb-in-hold to 4000.

AWOS-3	GRAND FORKS APP CON *	UNICOM
118.625	118.1 318.1	122.8 (CTAF) L

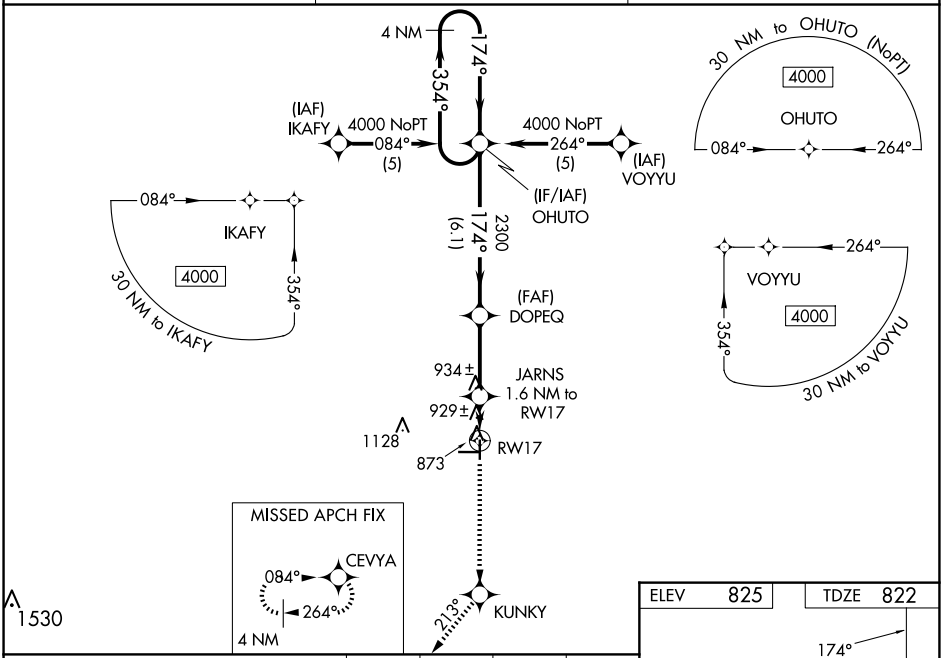

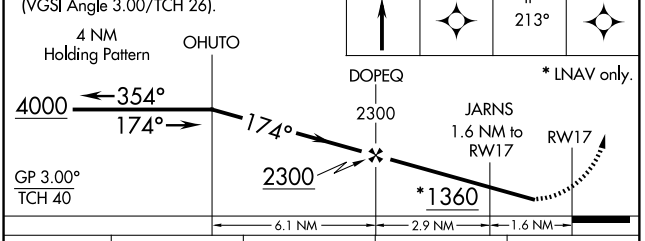

CATEGORY	A	B	C	D
LPV DA	1072-1	250 (300-1)		NA
LNAV/VNAV DA	1228-1½	406 (500-1½)		NA
LNAV MDA	1200-1	378 (400-1)		NA
CIRCLING	1340-1	515 (600-1)	1440-1¾ 615 (700-1¾)	NA

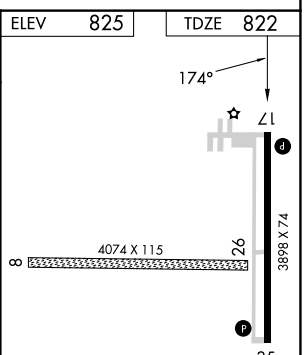

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026