WAAS	APP CRS	Rwy Ldg **4300**
CH **93910**	**272°**	TDZE **22**
W27A		Apt Elev **22**

RNAV (GPS) RWY 27L

NORTH PALM BEACH COUNTY GENERAL AVIATION (F45)


RNP APCH - GPS.

Circling NA to Rwys 9L and 27R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using DJT altimeter setting. When local altimeter setting not received, use DJT altimeter setting: increase LPV DA to 369 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 423 feet and all visibilities ⅛ SM; increase all MDA 40 feet and Cat C/D visibility ⅛ SM. Rwy 27L helicopter visibility reduction below ¾ SM NA.


NA


MISSED APPROACH: Climb to 2500 direct YIGBO and hold.

AWOS-3	PALM BEACH APP CON	UNICOM
119.975	**128.3 317.4**	**123.075** (CTAF) L

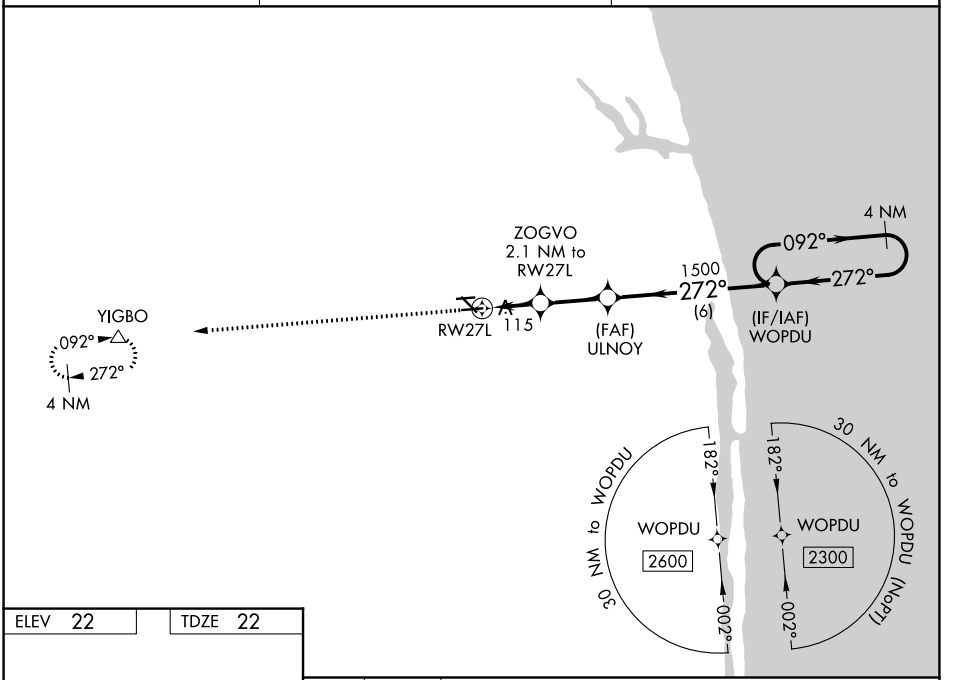

ELEV 22 TDZE 22



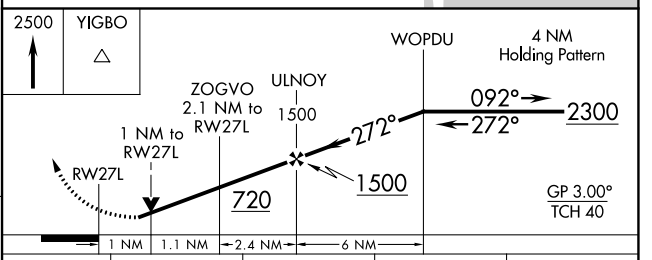

CATEGORY	A	B	C	D
LPV DA	341-⅞	319 (400-⅞)		
LNAV/VNAV DA	395-1	373 (400-1)		
LNAV MDA	380-1	358 (400-1)		
CIRCLING	460-1 438 (500-1)	480-1 458 (500-1)	700-2 678 (700-2)	720-2¼ 698 (700-2¼)

MIRL Rwys 9R-27L and 14-32 L
REIL Rwys 9R, 14, 27L and 32 L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026