WAAS	APP CRS	Rwy Ldg 4292
CH 77636	187°	TDZE 491
W19A		Apt Elev 492

RNAV (GPS) RWY 19


FINGER LAKES RGNL (ØG7)


NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Syracuse altimeter setting. Rwy 19 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Syracuse altimeter setting and increase all LPV DA to 856 feet, LNAV/VNAV DA to 1226 feet and all MDA 100 feet; increase LPV all Cats visibility ¼ SM and LNAV/VNAV all Cats visibility ½ SM.


MISSED APPROACH: Climb to 1200 then climbing left turn to 2400 direct JLIET and hold.

AWOS-3	SYRACUSE APP CON	ROCHESTER APP CON	ELMIRA APP CON ★	UNICOM
120.0	126.125 269.125	119.55 269.6 (W-NW)	124.3 257.8 (SW-SE)	122.8 (CTAF) L

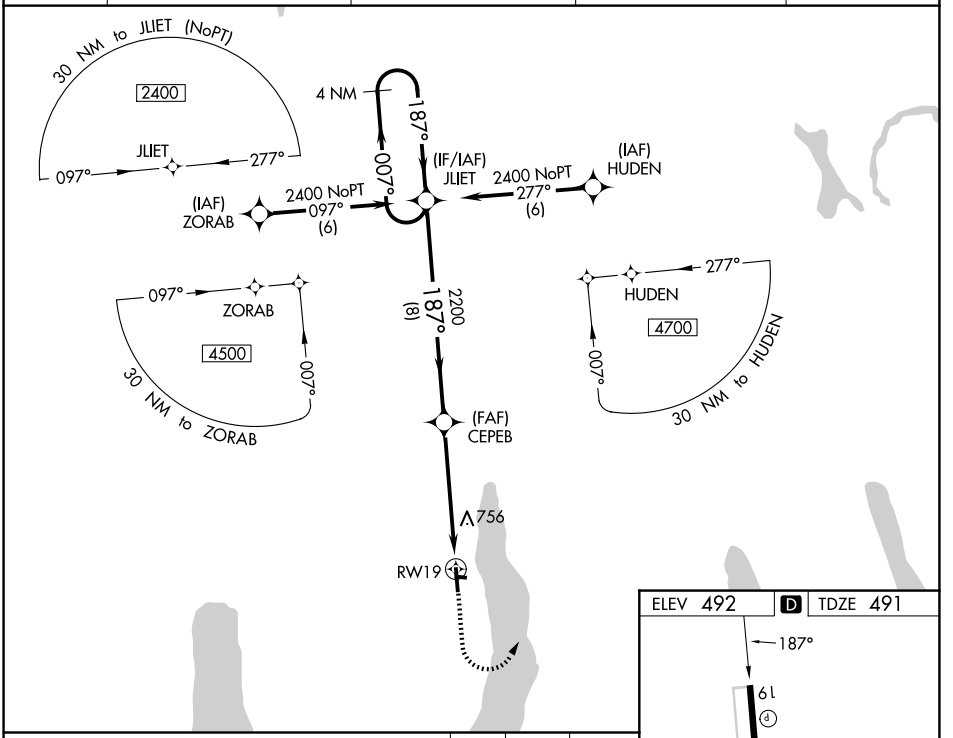

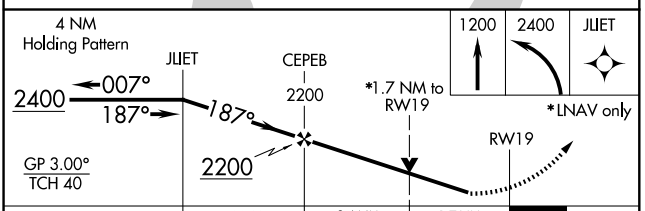

CATEGORY	A	B	C	D
LPV DA	770-1	279 (300-1)	NA	
LNAV/VNAV DA	1140-2½	649 (700-2½)	NA	
LNAV MDA	1060-1	569 (600-1)	NA	
CIRCLING	1060-1 568 (600-1)	1180-1 688 (700-1)	NA	

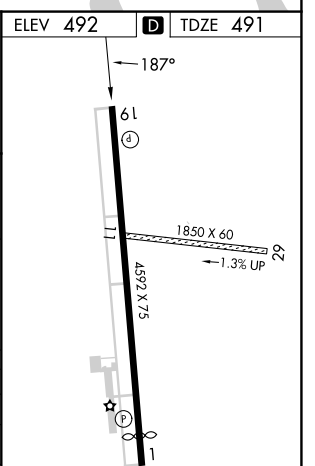

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026