

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE SLI.

SEAL BEACH (VL) VORTACW 115.7 SLI Chan 104 N33°47.00' W118°03.29' 110° 11.3 NM to fld. 22/15E.

VOR unusable:

- 017°-027° byd 40 NM blo 18,000'
- 028°-038° byd 40 NM
- 075°-085° byd 40 NM blo 8,000'
- 075°-085° byd 48 NM blo 11,000'
- 075°-085° byd 65 NM
- 086°-123° byd 40 NM
- 124°-134° byd 40 NM blo 4,000'
- 124°-134° byd 48 NM
- 125°-180° byd 30 NM blo 4,000'
- 135°-145° byd 40 NM
- 183°-193° byd 40 NM
- 245°-256° byd 40 NM blo 5,500'
- 245°-256° byd 57 NM
- 278°-282° byd 40 NM
- 321°-016° byd 40 NM

TACAN AZIMUTH unusable:

- 125°-195° byd 20 NM blo 5,000'

DME unusable:

- 125°-195° byd 20 NM blo 5,000'

ILS/DME 111.75 I-SNA Chan 54(Y) Rwy 20R. Class IE. Unmonitored when ATCT closed. LOC back course unusable byd 30° left and 25° right of course. LOC unusable byd 30° left of course.

LDA/DME 108.3 I-OJW Chan 20 Rwy 20X. LDA unmonitored when ATCT clsd. Ry 20X created to support OJW LDA associated with SNA ILS Rwy 20R.

SANTA BARBARA HUG N34°22.60' W120°10.11'/152

LOS ANGELES

AWOS-3 119.625 (805) 961-4256 Private owner: offshore harmony platform

SANTA BARBARA MUNI (SBA)(KSBA) 7 W UTC-8(-7DT) N34°25.57' W119°50.49'

LOS ANGELES

14 B TPA—See Remarks ARFF Index—See Remarks NOTAM FILE SBA

H-4H, L-3D, 4F, 7A

IAP, AD

RWY 07-25: H6052X150 (ASPH-GRVD) S-110, D-160, 2S-175,

2D-245 PCN 66 F/A/X/U HIRL

RWY 07: MALSR. RVR-T Tree. Rgt tfc.

RWY 25: REIL. PAPI(P4L)—GA 3.0° TCH 50'. RVR-R Fence.

RWY 15R-33L: H4184X100 (ASPH) S-48, D-63, 2S-80, 2D-100

PCN 19 F/A/X/U MIRL

RWY 15R: REIL. Tree.

RWY 33L: Tree. Rgt tfc.

RWY 15L-33R: H4180X75 (ASPH) S-35, D-41, 2S-80, 2D-63

PCN 14 F/A/X/T

RWY 15L: Bldg.

RWY 33R: Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 07: TORA-6052 TODA-6052 ASDA-6052 LDA-6052

RWY 15L: TORA-4180 TODA-4180 ASDA-4180 LDA-3963

RWY 15R: TORA-4184 TODA-4184 ASDA-4184 LDA-4184

RWY 25: TORA-6052 TODA-6052 ASDA-6052 LDA-6052

RWY 33L: TORA-4184 TODA-4184 ASDA-4184 LDA-4184


RWY 33R: TORA-4180 TODA-4180 ASDA-4180 LDA-4180

SERVICE: S4 FUEL 100LL, JET A OX 1, 2, 3, 4 LGT When ATCT clsd

ACTVT MALSR Rwy 07; REIL Rwy 15R; MIRL Rwy 15R-33L—CTAF. REIL Rwy 25; PAPI Rwy 25; HIRL Rwy 07-25 opr consly.

NOISE: Noise abatement procedures in effect ctc arpt ops 805-692-6011.

AIRPORT REMARKS: Attended 1400-0700Z†. 100LL fuel 24 hr credit card svc avbl. Fee for Jet A fuel after hrs call 805-454-0051 or 967-5608. Numerous flocks of birds on and invof arpt. Rwy 15L-33R dalgt hrs only. Class I, ARFF Index C. Rwys 15L-33R and 15R-33L not avbl for sked acr oprs with more than 9 psgr seats or unsked acr at least 31 psgr seats. All acr actf ctc on freq 121.7 prior to pushback from trml ramp and ron prkg 1400-0700Z†. Escorts rprd from ron prkg when atc is closed; ctc arpt ops 805-681-4803. Due to ltd ramp space at the airline terminal non-scheduled transport category acft with more than 30 passenger seats are required to ctc arpt ops 805-681-4803 24 hour PPR to arrival. Commercial airline ramp clsd to all General Aviation actf. No customs personnel or facilities are avbl and international acft will not be allowed to land unless an emerg exists. TPA-1004(990) small acft, 1504(1490) large acft. Pure jet touch/go or low approaches prohibited. Ldg fee for Part 135 oprs and trst acft with max GWT of 10,000 lbs or more. Fees will be billed/mailed. Ldg fee.

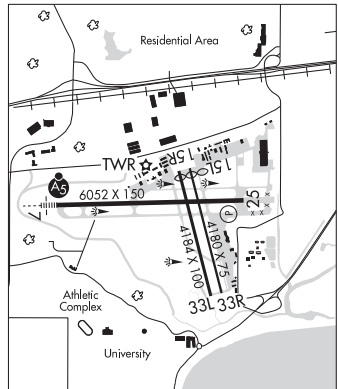

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

AIRPORT MANAGER: 805-967-7111

WEATHER DATA SOURCES: ASOS 132.65 (805) 681-0583.

COMMUNICATIONS: CTAF 119.7 ATIS 132.65 UNICOM 122.95

RCO 122.3 (HAWTHORNE RADIO)

Ⓡ APP/DEP CON 120.55 (151°-329°) 125.4 (330°-150°) 124.15 127.725 (1400-0700Z‡)

Ⓡ L.A. CENTER APP/DEP CON 119.05 (0700-1400Z‡)

TOWER 119.7 (1400-0700Z‡) GND CON 121.7 CLNC DEL 132.9

AIRSPACE: CLASS C svc ctc APP CON svc 1400-0700Z‡; other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE HHR.

SAN MARCUS (VH) (H) VORTAC 114.9 RZS Chan 96 N34°30.57' W119°46.26' 201° 6.1 NM to fld. 3598/14E.

VOR unusable:

066°-076° byd 40 NM blo 9,300'

066°-076° byd 48 NM

077°-081° byd 40 NM

082°-097° byd 40 NM blo 9,000'

082°-097° byd 51 NM

134°-140° byd 40 NM

140°-178° byd 27 NM

318°-065° byd 40 NM

GAVIOTA (VL) (H) VORTACW 113.8 GVO Chan 85 N34°31.88' W120°05.47' 101° 13.9 NM to fld. 2616/16E.

TACAN AZIMUTH unusable:

000°-095° byd 20 NM blo 12,500'

117°-137° byd 35 NM

310°-095° byd 10 NM blo 8,500'

DME unusable:

000°-095° byd 20 NM blo 12,500'

117°-137° byd 35 NM

310°-095° byd 10 NM blo 8,500'

VOR unusable:

276°-282° byd 40 NM

292°-297° byd 40 NM

302°-312° byd 40 NM blo 6,000'

302°-312° byd 60 NM

352°-057° byd 40 NM

ILS/DME 110.3 I-SBA Chan 40 Rwy 07. Class IA. Unmonitored when ATCT clsd.

SANTA CATALINA N33°22.50' W118°25.19' NOTAM FILE HHR.

LOS ANGELES

(VL) (H) VORTACW 114.15 SXC Chan 88(Y) 352° 1.8 NM to Catalina. 2090/15E.

H-4I, L-3E, 4G

VOR unusable:

040°-055° byd 40 NM

314°-360° byd 25 NM

TACAN AZIMUTH unusable:

314°-360° byd 25 NM

DME unusable:

314°-360° byd 25 NM