CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS D.
RADIO AIDS TO NAVIGATION: NOTAM FILE TEB.
(T) (T) VORW/DME 108.4 TEB Chan 21 N40º50.92´ W74º03.73´ at fld. 8/11W.
DME unusable:
060º–080º byd 22 NM blo 2,500´
081º–120º blo 4,000´
121º–180º blo 3,000´
236º–246º
VOR unusable:
081º–120º blo 4,000´
121º–180º blo 3,000´
236º–246º
ILS/DME 111.75 I–TEB Chan 54(Y) Rwy 06. Class IE. LOC unusable byd 14º left of course. Glideslope unusable byd 6º left of course.
ILS/DME 110.15 I–TJL Chan 38(Y) Rwy 19. Class IE.
COMM/NAV/WEATHER REMARKS: For radar svc blo 1800´ ctc Teterboro twr frequency 119.5. Arpt ops frequency 130.575.

TOMS RIVER

OCEAN CO (MJX)(KMJX) 5 SW UTC–5(–4DT) N39º55.56´ W74º17.73´ **WASHINGTON**
86 B NOTAM FILE MJX **H–10I, 12J, L–34G**
IAP

RWY 06–24: H5950X100 (ASPH) S–100, D–176, 2D–581
PCN 45 F/A/X/T HIRL
RWY 06: MALSR. PAPI(P2L)—GA 3.0º TCH 56´.
RWY 24: REIL. PAPI(P2L)—GA 3.0º TCH 55´. Thld dsplcd 115´.
RWY 14–32: H3599X75 (ASPH) S–94, D–150 PCN 35 F/A/X/T MIRL
0.3% Up NW
RWY 14: REIL. PAPI(P2L)—GA 3.0º TCH 40´.
RWY 32: REIL. PAPI(P2L)—GA 3.0º TCH 40´.
RUNWAY DECLARED DISTANCE INFORMATION
RWY 06: TORA–5950 TODA–5950 ASDA–5835 LDA–5835
RWY 24: TORA–5950 TODA–5950 ASDA–5950 LDA–5835
SERVICE: S4 **FUEL** 100LL, JET A **OX** 3 **LGT** ACTIVATE MALSR Rwy 06; REIL Rwy 14, Rwy 32, Rwy 24; PAPI Rwy 06, Rwy 24, Rwy 14 and Rwy 32; HIRL Rwy 06–24; MIRL Rwy 14–32—CTAF.
AIRPORT REMARKS: Attended Apr–Oct 1300–0100Z‡, Nov–Mar 1300–2200Z‡. Unatndd Christmas and New Years Day. Prearrange for svcs aft hrs call 732–797–1077. Deer on and invof arpt.
AIRPORT MANAGER: (732) 929-2054
WEATHER DATA SOURCES: AWOS–3PT 119.875 (732) 797–2542.
COMMUNICATIONS: CTAF/UNICOM 122.7
Ⓡ **MC GUIRE APP/DEP CON** 126.475
CLEARANCE DELIVERY PHONE: For CD ctc Mc Guire Apch at 609-754-2767.
RADIO AIDS TO NAVIGATION: NOTAM FILE MIV.
COYLE (H) (H) VORTACW 113.4 CYN Chan 81 N39º49.04´ W74º25.90´ 054º 9.1 NM to fld. 203/10W.
VOR unusable:
044º–054º blo 3,800´
ILS 109.9 I–MJX Rwy 06. Class IA. Unmonitored.

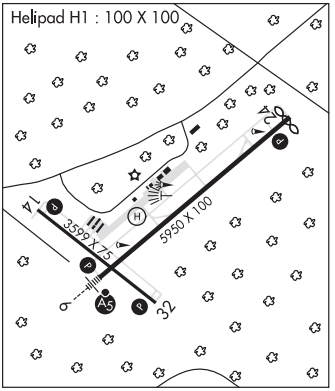

• • • • • • • • • • • • • • • • • •

HELIPAD H1: H100X100 (ASPH)
HELIPORT REMARKS: Helipad H1 perimeter lights. ACTIVATE perimeter lgts—CTAF.