

GOODYEAR

PHOENIX GOODYEAR (GYR)(KGYR) 1 SW UTC-7 N33°25.40' W112°22.52'

969 B TPA—See Remarks NOTAM FILE GYR

RWY 03-21: H8500X150 (ASPH) S-115, D-225, 2D-505,

2D/2D2-985 PCN 66 F/B/W/T MIRL

RWY 03: REIL. PAPI(P4L)—GA 3.0° TCH 53'. 0.4% up.

RWY 21: REIL. PAPI(P4L)—GA 3.0° TCH 53'. Rgt tfc. 0.3% down.

SERVICE: S4 FUEL 100LL, JET A OX 1, 2, 3, 4 LGT SS-SR REIL Rwy 03 and Rwy 21; PAPI Rwy 03 and Rwy 21; MIRL Rwy 03-21 opr consly, all other times ctc - 623-932-4550.

NOISE: Noise abatement proc in efct; tfc pat rmn close to arpt & S of I-10 hwy. Tfc N of I-10 hwy mntn 1000 ft until S - info 602-773-1093.

AIRPORT REMARKS: Attended continuously. Lrg acct prkg 500 ft W of rwy.

4500 MSL mtns 6 mi SE; mil jet tfc 5 mi W; birds invof arpt; wildlife on arpt. When twr clsd Twy A btw Twy A3 and Twy A10 rstd to wingspan 118 ft or less. Rwy 3 100 ft unlgt unmkd E-W pwr lines 1/2 mi S of rwy end. Dep assigned R crosswind climb straight ahd to Litchfield Rd or passing 1032 ft bfr r turn. TPA-1969(1000) light acct and non-turbo jets; 2469(1500) heavy acct and turbo jets; 1469(500) helicopters. User Feed Arpt: Fee for charter, travel club and revenue acct. CAUTION: Similar aligned rwys at Luke AFB & Glendale Muni; both aprx 8 mi N. NOTE: See Special Notices—Aerobatic Operations; See Special Notices—Arrival Alert.

AIRPORT MANAGER: 623-932-4550

WEATHER DATA SOURCES: LAWRS.

COMMUNICATIONS: CTAF 120.1 ATIS 118.35 UNICOM 122.95

PHOENIX RCO 122.2 (PRESCOTT RADIO)

Ⓡ **LUKE APP/DEP CON 125.45** (1300-0530Z Mon-Thu, 1300-0130Z Fri, clsd wkend, hol and AETC family days).

Ⓡ **PHOENIX APP/DEP CON 120.7** (0530-1300Z Tue-Fri; 0130Z Sat-1300Z Mon, H24 hol and AETC family days).

GOODYEAR TOWER 120.1 (1300-0400Z) **GND CON 121.7**

CLEARANCE DELIVERY PHONE: For CD when ATCT clsd, ctc Phoenix Apch at 602-306-2565.

AIRSPACE: CLASS D svc 1300-0400Z; other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

BUCKEYE (L) (L) VORTAC 110.6 BXX Chan 43 N33°27.21' W112°49.48' 080° 22.6 NM to fld. 1067/14E.

VOR unusable:

060°-075° byd 28 NM blo 4,000'

230°-260° byd 35 NM blo 5,000'

280°-320° byd 35 NM blo 7,000'

320°-020° byd 37 NM blo 6,000'

TACAN AZIMUTH unusable:

020°-072° byd 28 NM blo 8,000'


DME unusable:

020°-072° byd 28 NM blo 8,000'

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not available at twr.

HELIPAD H1: H64X64 (CONC) PERIMETER LGTS

HELIPORT REMARKS: Helipad H1 intens rwy lgts: med intsty.

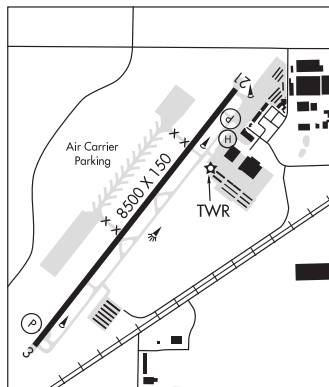

PHOENIX
H-4J, L-5B, A
IAP, AD